



## Repairing LG VX5200 Antenna

### Tools used in this guide

- [Phillips #00 Screwdriver](#)



## Step 1 - Battery

- Turn the phone on its back.



## Step 2

- Orient the phone as shown.
- Remove the battery cover by pushing upward with your thumb.




### Step 3

- Place your fingernail at the top of the battery and pry the battery out towards you.





### Step 4 - Rear body panel

- Orient the phone as shown with the battery already removed.

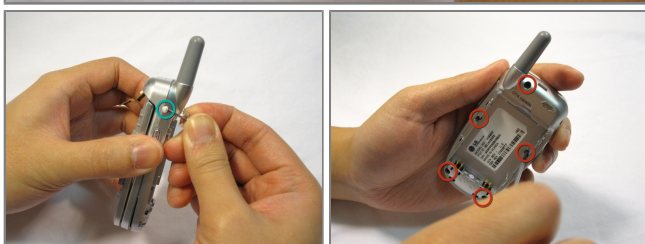


### Step 5

- Remove the 2 plastic plugs located on the side and upper quadrant of the rear body panel by using the push-pin and lifting outwards.
- Use a Phillips #00 screwdriver to remove the 5 screws as shown here.

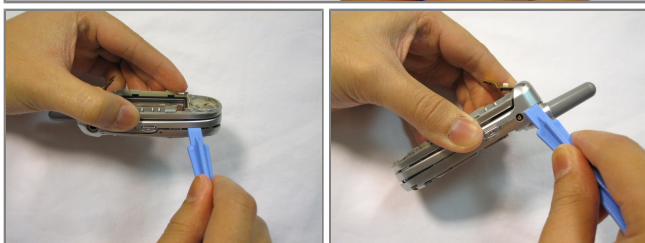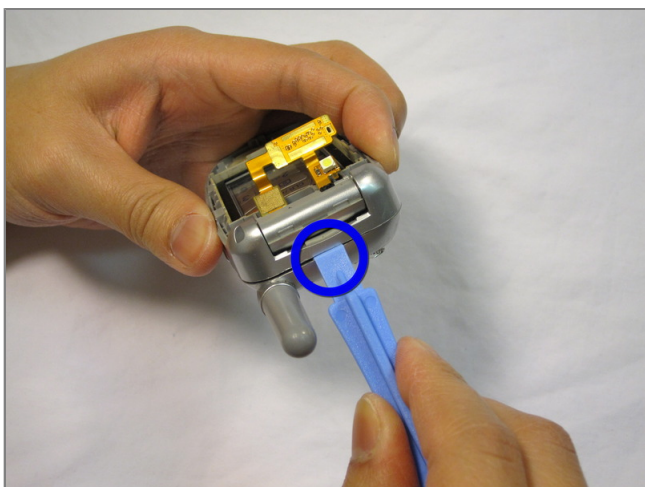


### Step 6

- Place an iPod opener tool in the seam above the antenna.
- Run the tool around the perimeter of the entire phone.

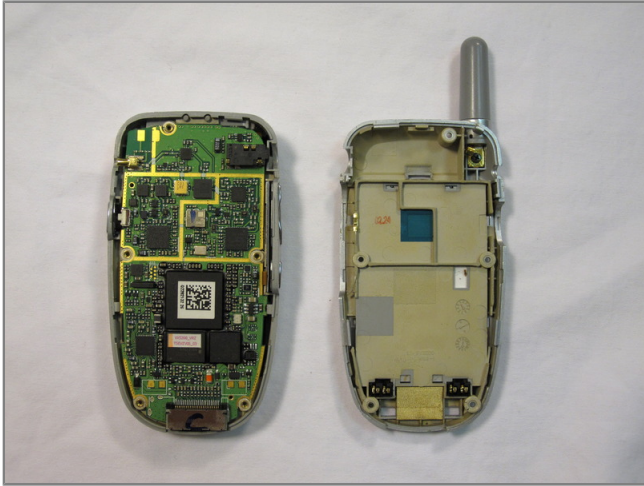

### Step 7


- Check to see that your device looks like the attached photo.

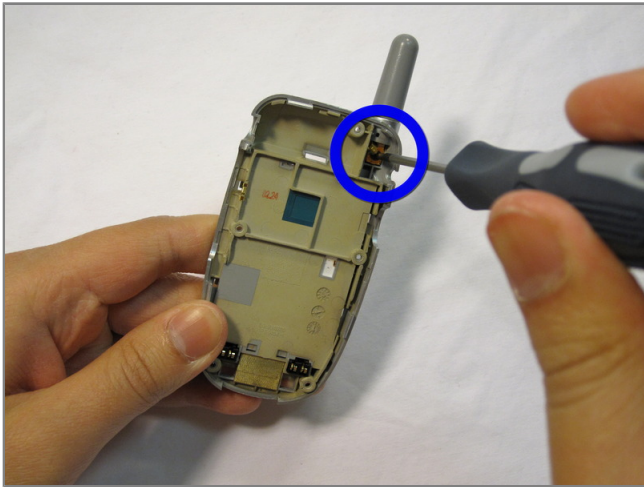

### Step 8 - Antenna



- Locate the screw and copper fixture that hold the antenna in place.
- Remove the screw from the device using a Philips #00 screwdriver.



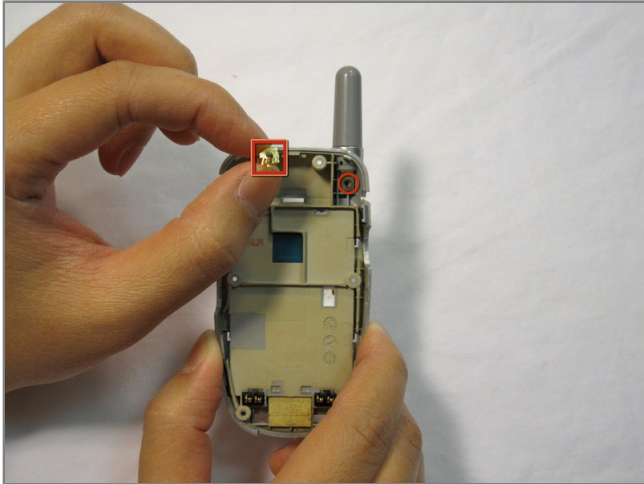

### Step 9

- Remove the copper fixture after it has been unscrewed.

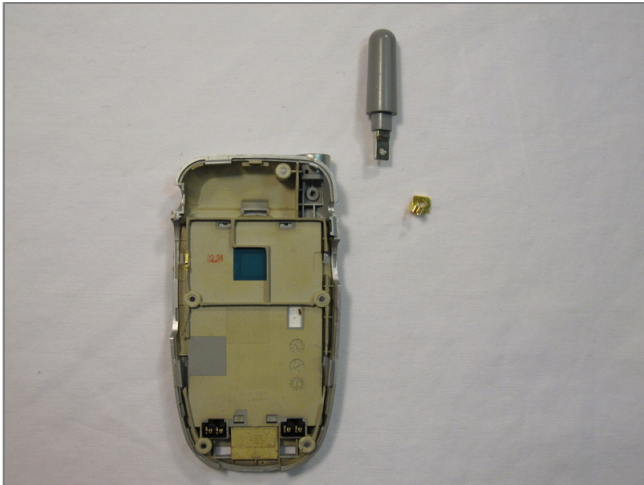

### Step 10

- Check to see that your device looks like the attached photo.

